

QUATRO C

With decorative front panel

Features



- Wall and ceiling mounting.
- Quatro C (127-220V/60Hz)** series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains.
- Easy maintenance.
- Low noise impeller.
- Continuous operation.
- Backdraft damper.
- Ball bearing motor.
- Available in metallic (Quatro C Platinum), aluminium (Quatro C Hi-Tech), chrome (Quatro C Hi-Tech Chrome) and gold (Quatro C Hi-Tech Gold) decorations.
- 5 year warranty.



Air flow:
up to 265 m³/h
74 l/s



Power:
from 14 W



Noise level:
from 33 dBA



Platinum



Hi-tech Gold




Hi-tech Chrome



Hi-tech

Overall dimensions and mounting

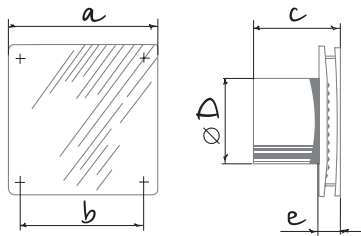


Technical data

| Model | Quatro C 100 | Quatro C 125 | Quatro C 150 |
|------------------------------------|--------------|--------------|--------------|
| Voltage [V/Hz] | 220-240/50 | 220-240/50 | 220-240/50 |
| Power [W] | 14 | 16 | 24 |
| Current [A] | 0,085 | 0,1 | 0,13 |
| RPM [min ⁻¹] | 2300 | 2400 | 2400 |
| Air flow [m ³ /h (l/s)] | 88 (24) | 167 (46) | 265 (74) |
| SFP [W/l/s] | 0,57 | 0,34 | 0,33 |
| Sound pressure level [dBA] | 33 | 34 | 37 |

| Dimensions, mm | a | b | c | ∅ d | e |
|----------------|-----|-----|-----|-----|----|
| Quatro C 100 | 152 | 120 | 126 | 100 | 30 |
| Quatro C 125 | 177 | 140 | 135 | 125 | 34 |
| Quatro C 150 | 206 | 165 | 154 | 150 | 36 |

| Designation key | | | |
|-----------------|----------|-----------------|--------|
| Model | Color | Spigot diameter | Option |
| Quatro C | Platinum | 100 | T |

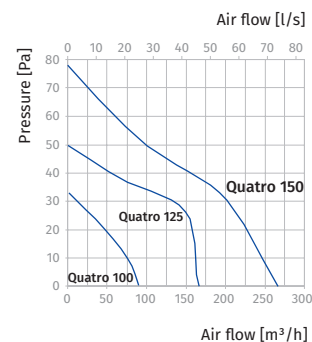

Options



| Model | Quatro C 100 | | | Quatro C 125 | | | Quatro C 150 | | |
|-----------------|--------------|---------|---------|--------------|---------|---------|--------------|---------|---------|
| | Basic | T | H | Basic | T | H | Basic | T | H |
| Timer | | • | • | | • | • | | • | • |
| Humidity sensor | | | • | | | • | | | • |
| Item number | 8000065 | 8000119 | 8000072 | 8000126 | 8000188 | 8000140 | 8000195 | 8000249 | 8000201 |

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.



Accessories

| Duct system | Flexible air ducts | Grilles and hoods | Speed controllers | Clamps |
|-------------|--------------------|-------------------|-------------------|--------|
| | | | | |
| BlauPlast | BlauFlex | Decor, GM | COT E1.8 | K, KZ |